

Release Notes for DrayTek Vigor2620 series (UK/Ireland)

Firmware Version	3.8.13 BT (Formal Release)
Release Type	Regular – Upgrade recommended when convenient
Build Date	14 th October 2019
Release Date	31 st October 2019
Revision	84980
Applicable Models	Vigor 2620Ln
VDSL Modem Code	576D17
ADSL Modem Code	572801
Locale	UK & Ireland Only

New Features

1. Draytek Cloud VPN feature (VPN Matcher) added, which can be found in [VPN and Remote Access] > [Cloud VPN General Setup]
2. WAN Budget support added to manage data usage and failover on metered connections
3. DNS Filter is now available for use with URL Content Filtering & Web Content Filtering

Improvements

1. Keep Alive Ping timeout can trigger the LTE dual SIM failover
2. Incorrect subnet mask resulted in bridged devices being unable to communicate with other devices (bridged DHCP packets via LTE module)
3. SIM1 or SIM2 can now be selected as the primary SIM card
4. Additional failover settings can now be configured for each SIM card

Known Issues

(None)


Firmware File Types

The ZIP file contains the firmware with two different file extensions, .ALL and .RST. The firmware is identical but the RST file contains factory default settings. If you install the ALL file, your router will retain all existing settings. If you use the RST file, all settings will be wiped from your router.

Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the router's system maintenance menu.

To upgrade firmware, select '*firmware upgrade*' from the router's system maintenance menu and select the correct file. Ensure that you select the ALL file unless you want to wipe out your router's settings back to factory default.

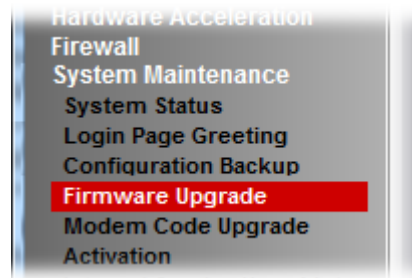

Manual Upgrade

If you cannot access the router's menu, you can put the router into 'TFTP' mode by holding the RESET whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by all LEDs flashing. This mode will also be automatically enabled by the router if there is a firmware/settings abnormality. Upgrading from the web interface is easier and recommended – this manual mode is only needed if the web interface is inaccessible.

Firmware Version	3.8.12_BT (Formal Release)
Release Type	Initial Release
Build Date	7 th May 2019
Release Date	10 th June 2019
Revision	81772
Applicable Models	Vigor 2620Ln
VDSL Modem Code	576D17
ADSL Modem Code	572801
Locale	UK & Ireland Only

First Firmware Release for this model

New Features

(None)

Improvements

(None)

Known Issues

(None)

[END OF FILE]