

Release Notes for DrayTek Vigor2763 series (UK/Ireland)

Firmware Version	4.4.2.1_BT (Formal Release)
Release Type	Initial Release
Build Date	20 th May 2022
Release Date	13 th July 2022
Revision	3602_32d3eee80d
Applicable Models	Vigor2763, Vigor2763ac
VDSL Modem Code	77B507
ADSL Modem Code	775401
Locale	UK & Ireland Only

First Firmware Release for this model

New Features

(None)

Improvements

(None)


Firmware File Types

The ZIP file contains the firmware with two different file extensions, .ALL and .RST. The firmware is identical, but the RST file contains factory default settings. If you install the ALL file, your router will retain all existing settings. If you use the RST file, all settings will be wiped from your router.

Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the router's system maintenance menu.

To upgrade firmware, select '*firmware upgrade*' from the router's system maintenance menu and select the correct file. Ensure that you select the ALL file unless you want to wipe out your router's settings back to factory default.

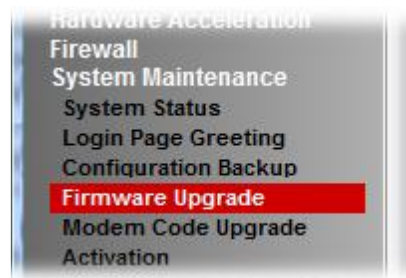

Manual Upgrade

If you cannot access the router's menu, you can put the router into 'TFTP' mode by holding the RESET whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by all LEDs flashing. This mode will also be automatically enabled by the router if there is a firmware/settings abnormality. Upgrading from the web interface is easier and recommended – this manual mode is only needed if the web interface is inaccessible.

[END OF FILE]